


PCD3.K225

Interface cable PCD3.T760 web server to PC (length 2.5 m);
RIO configuration cable



Accessories for the configuration of the PCD3.T760

Serial interface RS-232

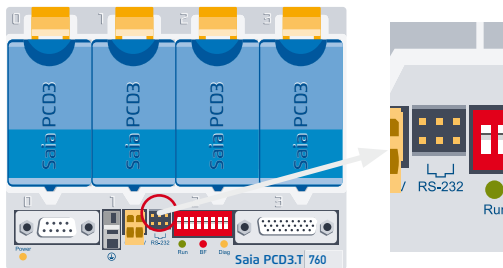


This connection supports configuration with a browser such as Internet Explorer (with PCD3.K225 connecting cable).

1	TXD
2	RTS
3	RXD
4	CTS
5	PGND
6	DSR

Web server for commissioning, diagnostics and service

The integrated web server in the PCD3.T760 provides the user with the greatest usage for commissioning, diagnosis and service. Access is via a popular, easy to operate standard web browser. Using RS-232 or Profi S-Net, users can access the predefined equipment and specific system HTML pages and all the information data in the RIOs.

This facilitates the checking of the states of all I/O signals (digital/analogue/counters) and specifically input/output states can be modified with a mouse click.

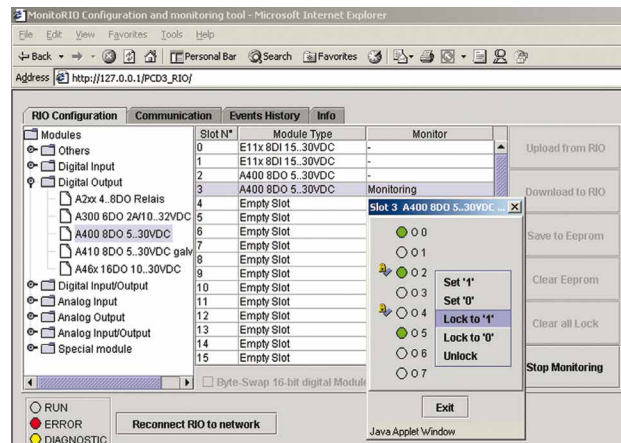

Ordering information

Type	Short description	Description	Weight
PCD3.K225	Interface cable 2.5 m	Interface cable PCD3.T760 web server to PC (length 2.5 m); RIO configuration cable	180 g

Saia-Burgess Controls AG

Bahnhofstrasse 18 | 3280 Murten, Switzerland
T +41 26 580 30 00 | F +41 26 580 34 99
www.saia-pcd.com

support@saia-pcd.com | www.sbc-support.com